



*Our 3/4" rib with its anti-siphon feature gives you a weather-tight seal*

- Shiny Black
- Black
- Charcoal
- Gray
- Bright White
- White
- Ivory
- Tan
- Stone
- Clay
- Burnished Slate
- Brown
- Red
- Dark Red
- Crimson Red
- Burgundy
- Gallery Blue
- Blue
- Evergreen
- Hartford Green
- Gold
- Copper


# G

# rib

## "METAL PANEL INFORMATION"



Our 3/4" rib with its anti-siphon feature gives you a weather-tight seal

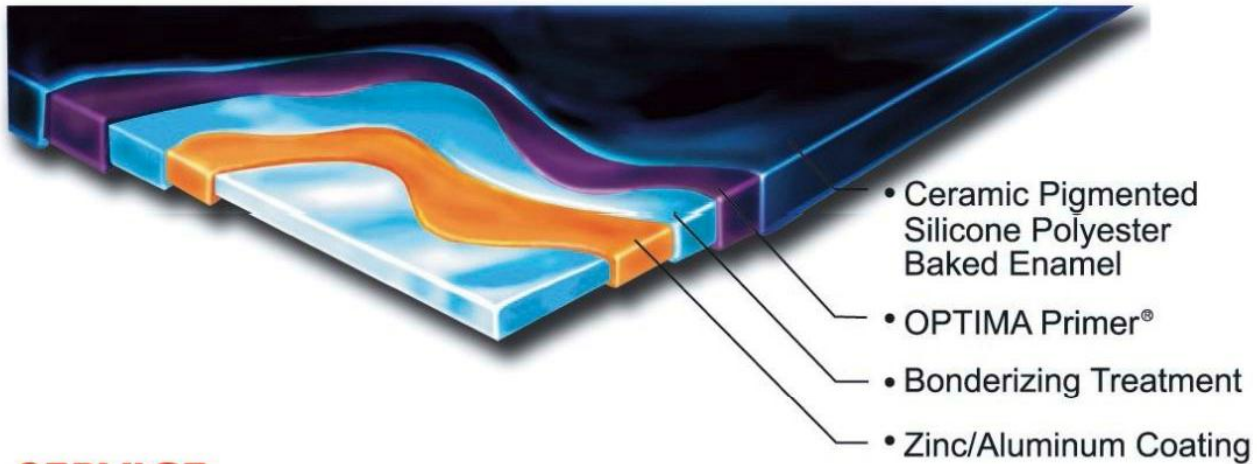

**SERVICE** Job lot quantities can be shipped directly from our factory to you. Each shipment, 1 sheet to 100, is paper wrapped in banded bundles for protection in transit and at the job site. Company owned and operated trucks deliver each shipment to insure on time deliveries. Our custom cut lengths, to-the-inch up to 60 feet, reduce or eliminate end laps. You get a tighter, stronger, more attractive building.

**DURABILITY** Constructed of 29 gauge high tensile steel (to ASTM A792 Grade E, 80,000 minimum yield - 82,000 minimum tensile specifications), our ribbed panels are easy to install, sturdy, and weather tight. Resistance to dents, plus minimal expansion/contraction properties make this steel panel an excellent investment providing lasting protection and greater durability that will enhance all types of structural designs.

**PROTECTION** First, each panel is coated with Galvalume®, a patented aluminum-zinc alloy coating for extra protection. Panels are then bonderized and an OPTIMA Primer® is applied. The primer supplies flexibility and provides an excellent base for the final coat CERAM-A-STAR®, a ceramic pigmented silicone polyester, supplies strength, hardness and durability against the effects of sun, wind, rain, heat and cold. It is extremely resistant to mildew. No blistering, peeling and flaking either!

SECTION PROPERTIES										
PROD. NAME	NOM. THICK IN.	WT. (PSF)	F <sub>y</sub> (KSI)	NET GIRTH IN.	PANEL TOP IN COMPR.			PANEL BOTTOM IN COMPR.		
					L in4/ft	S. in3/ft	F <sub>s</sub> ksi	L in4/ft	S. in3/ft	F <sub>s</sub> ksi
G.R.	.016	0.75	80	36	0.0075	0.0140	36.0	0.0072	0.0405	12.8
	.020	0.94	80	36	0.0095	0.0184	36.0	0.0094	0.0623	10.3

ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT																						
NOM. THK IN.	LIVE LOAD (STRESS)								LIVE LOAD DEFL. (L/180)					WIND SUCTION (UPLIFT)								
	2'	2.5'	3'	3.5'	4'	4.5'	5'		2'	2.5'	3'	3.5'	4'	4.5'	5'		2'	2.5'	3'	3.5'	4'	4.5'
.016	138	87	60	44	34	27	22	136	81	47	29	20	14	10	168	110	77	57	43	34	28	
.020	179	114	79	58	45	35	29	179	102	59	37	25	17	13	221	145	101	74	57	45	37	

.016 NOM. THK. Allow Int. Bearing @ 3" = 0.480 K/FT Allow. End Bearing @ 2" = 0.149 K/FT  
.020 NOM. THK. Allow Int. Bearing @ 3" = 0.709 K/FT Allow. End Bearing @ 2" = 0.254 K/FT